




CTC 14

Edge - 1/8" REVEAL

- Offers protection against chipping of the tile edges at transitions.
- Angled "L" distributes stress away from the tile edge through the body of the tile.
- Heights to match thickness of tile, stone or wood.
- Available in Bronze, Clear or Brass anodized finishes.

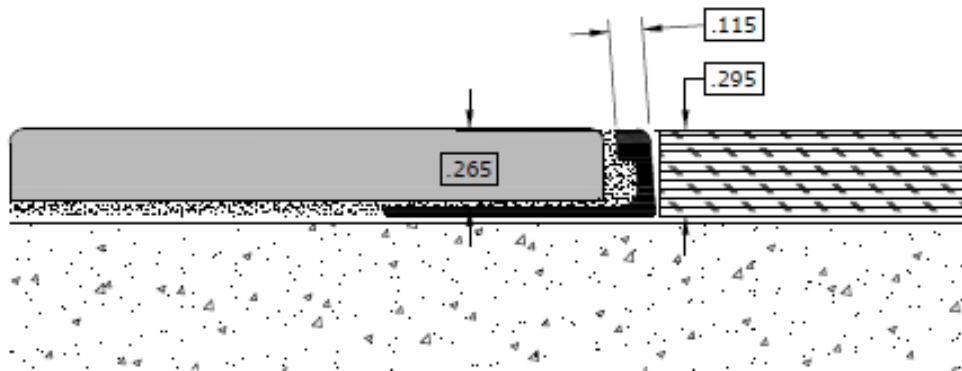

INSTALLATION INSTRUCTIONS

- Adhere perforated leg to sub-floor with hard flooring adhesive.
- Cover entire leg with adhesive and set tile or wood flush or slightly below the top of edge.
- Leave up to a 1/16" joint along the edge.

BUFFALO



STONE®


Featuring
Buffalo Stone Products



CTC 1132

Edge - 1/8" REVEAL

- Offers protection against chipping of the tile edges at transitions.
- Angled "L" distributes stress away from the tile edge through the body of the tile.
- Heights to match thickness of tile, stone or wood.
- Available in Bronze, Clear or Brass anodized finishes.

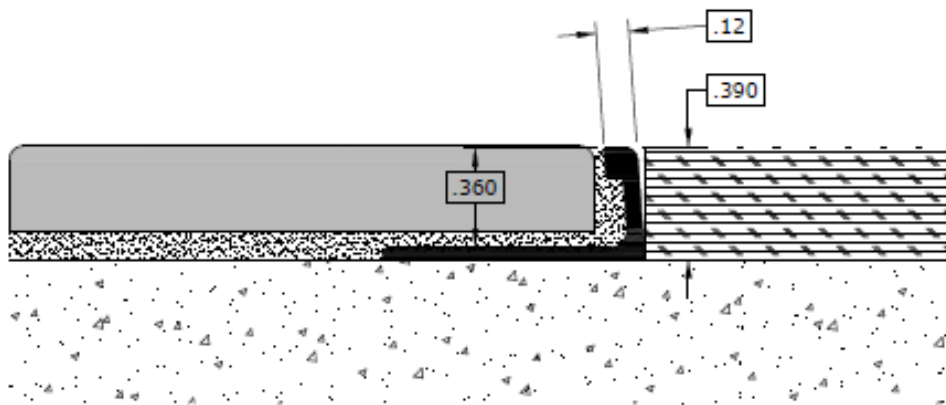

INSTALLATION INSTRUCTIONS

- Adhere perforated leg to sub-floor with hard flooring adhesive.
- Cover entire leg with adhesive and set tile or wood flush or slightly below the top of edge.
- Leave up to a 1/16" joint along the edge.






CTC 38

Edge - 1/8" REVEAL

- Offers protection against chipping of the tile edges at transitions.
- Angled "L" distributes stress away from the tile edge through the body of the tile.
- Heights to match thickness of tile, stone or wood.
- Available in Bronze, Clear or Brass anodized finishes.

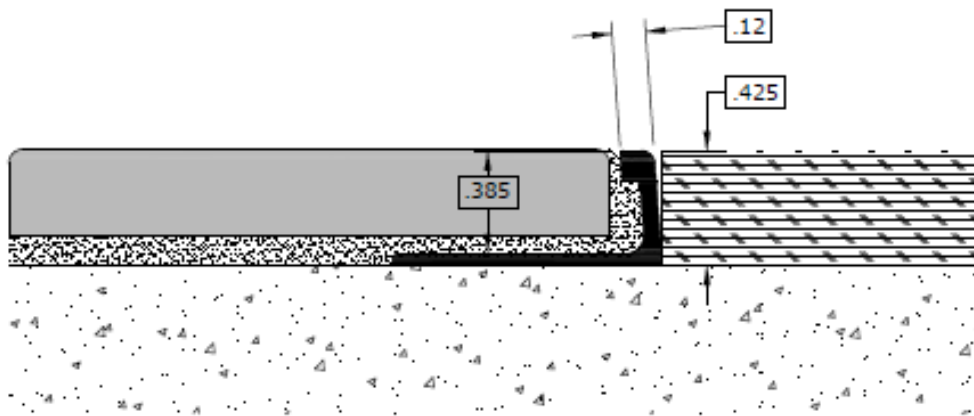

INSTALLATION INSTRUCTIONS

- Adhere perforated leg to sub-floor with hard flooring adhesive.
- Cover entire leg with adhesive and set tile or wood flush or slightly below the top of edge.
- Leave up to a 1/16" joint along the edge.






CTC 716

Edge - 1/8" REVEAL

- Offers protection against chipping of the tile edges at transitions.
- Angled "L" distributes stress away from the tile edge through the body of the tile.
- Heights to match thickness of tile, stone or wood.
- Available in Bronze, Clear or Brass anodized finishes.

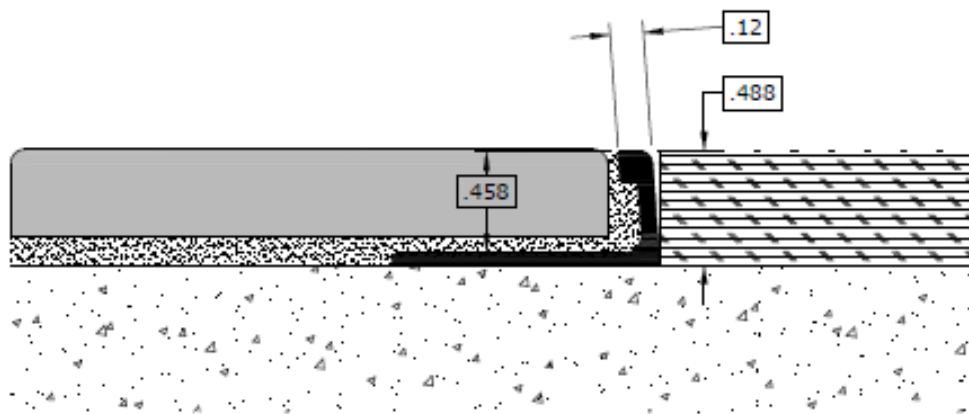

INSTALLATION INSTRUCTIONS

- Adhere perforated leg to sub-floor with hard flooring adhesive.
- Cover entire leg with adhesive and set tile or wood flush or slightly below the top of edge.
- Leave up to a 1/16" joint along the edge.

BUFFALO



STONE®


Featuring
Buffalo Stone Products



CTC 12

Edge - 1/8" REVEAL

- Offers protection against chipping of the tile edges at transitions.
- Angled "L" distributes stress away from the tile edge through the body of the tile.
- Heights to match thickness of tile, stone or wood.
- Available in Bronze, Clear or Brass anodized finishes.

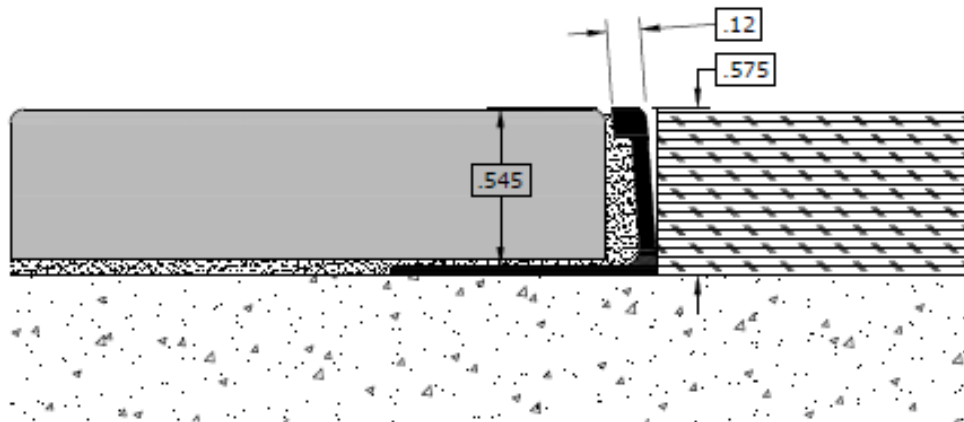

INSTALLATION INSTRUCTIONS

- Adhere perforated leg to sub-floor with hard flooring adhesive.
- Cover entire leg with adhesive and set tile or wood flush or slightly below the top of edge.
- Leave up to a 1/16" joint along the edge.






CTC 58

Edge - 1/8" REVEAL

- Offers protection against chipping of the tile edges at transitions.
- Angled "L" distributes stress away from the tile edge through the body of the tile.
- Heights to match thickness of tile, stone or wood.
- Available in Bronze, Clear or Brass anodized finishes.

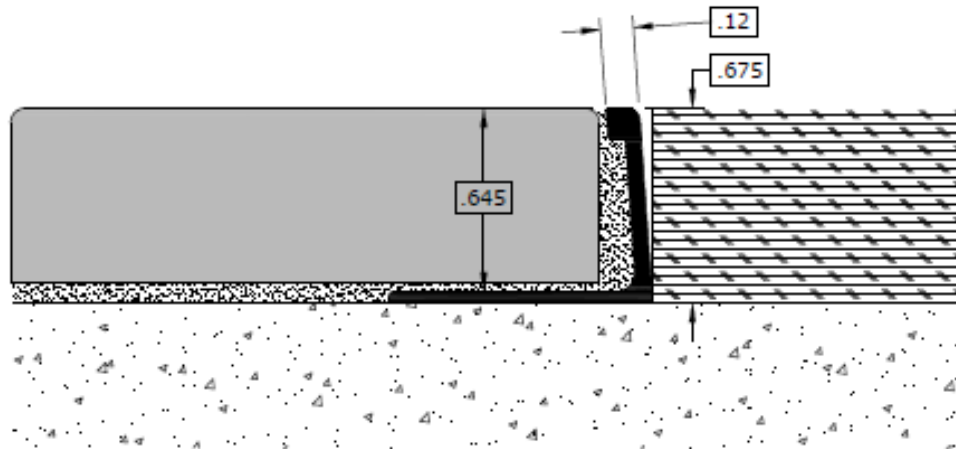

INSTALLATION INSTRUCTIONS

- Adhere perforated leg to sub-floor with hard flooring adhesive.
- Cover entire leg with adhesive and set tile or wood flush or slightly below the top of edge.
- Leave up to a 1/16" joint along the edge.






CTC 34

Edge - 1/8" REVEAL

- Offers protection against chipping of the tile edges at transitions.
- Angled "L" distributes stress away from the tile edge through the body of the tile.
- Heights to match thickness of tile, stone or wood.
- Available in Bronze, Clear or Brass anodized finishes.

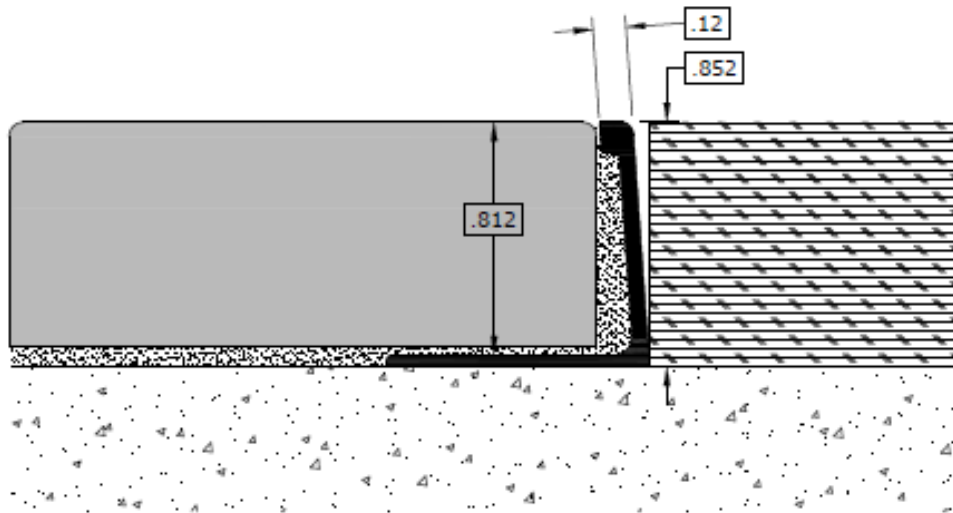

INSTALLATION INSTRUCTIONS

- Adhere perforated leg to sub-floor with hard flooring adhesive.
- Cover entire leg with adhesive and set tile or wood flush or slightly below the top of edge.
- Leave up to a 1/16" joint along the edge.

BUFFALO



STONE®


Featuring
Buffalo Stone Products



CTC 78

Edge - 1/8" REVEAL

- Offers protection against chipping of the tile edges at transitions.
- Angled "L" distributes stress away from the tile edge through the body of the tile.
- Heights to match thickness of tile, stone or wood.
- Available in Bronze, Clear or Brass anodized finishes.

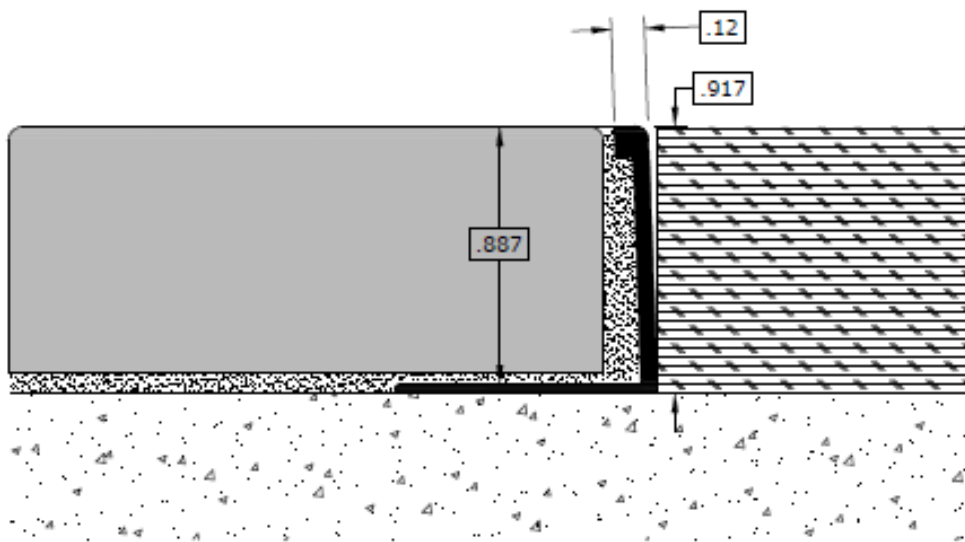

INSTALLATION INSTRUCTIONS

- Adhere perforated leg to sub-floor with hard flooring adhesive.
- Cover entire leg with adhesive and set tile or wood flush or slightly below the top of edge.
- Leave up to a 1/16" joint along the edge.

