




## CTC Ramp

### Reducer – 1" Width

- Meets ADA Guidelines
- Reduces gradually from 3/8" to 1/8" flooring transition.
- Can be used with tile, wood, or stone.
- Available in 8 LF lengths.

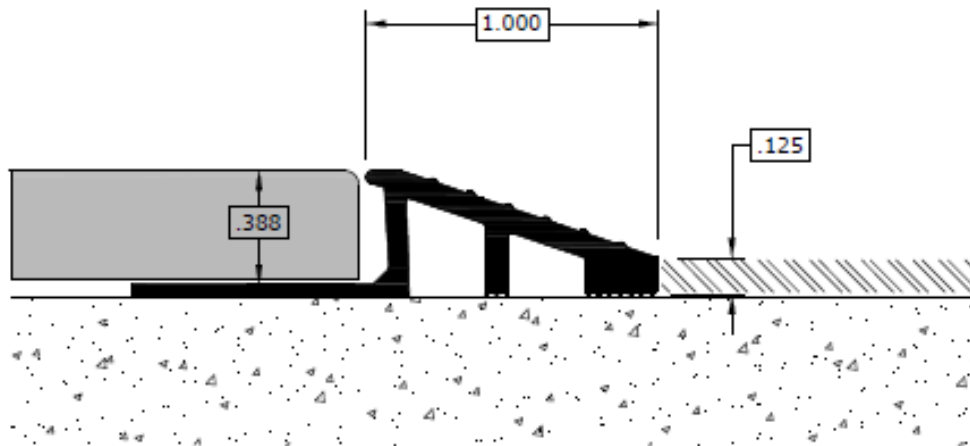

### Installation Instructions

- Adhere perforated leg to subfloor with construction adhesive or tile adhesive.
- Set tile or wood flush or slightly above the top of the Ramp.
- May also be mechanically fastened to subfloor.






## CTC Ramp XLK

### Reducer – 1 3/8" Width

- Meets ADA Guidelines
- Reduces impact damage where flooring terminates, using a more gradual slope for wheel traffic.
- Can be used with tile, wood, or stone.
- Available in 8 LF lengths.

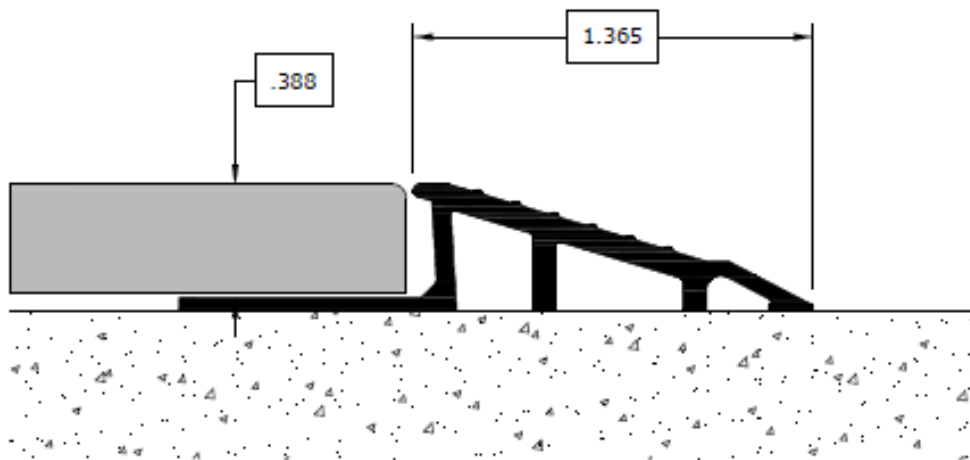

### Installation Instructions

- Adhere perforated leg to subfloor with construction adhesive or tile adhesive.
- Set tile or wood flush or slightly above the top of the Ramp.
- May also be mechanically fastened to subfloor.

BUFFALO



STONE®


Featuring  
Buffalo Stone Products



## CTC RAMP XL

### Reducer – 1" Width

- Provides a clean transition to adjoining lower floor.
- Designed to increase impact resistance to wheel traffic.
- Can be used with tile, stone or wood.
- Available in 8 ft. lengths.

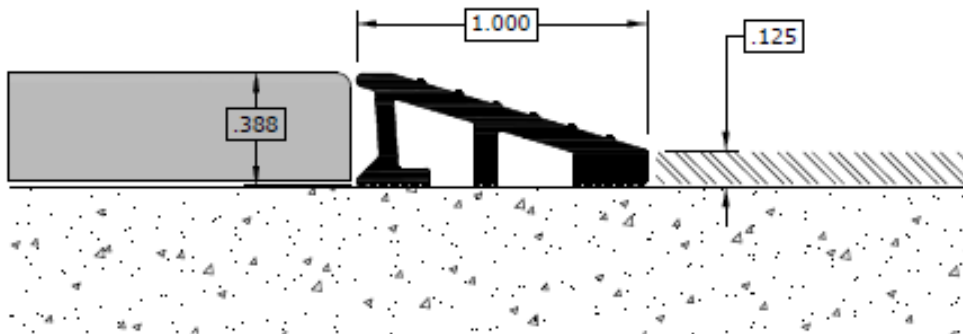

## Installation Instructions

- Butt 3/8" (height) side against hard surface flooring making it flush or slightly below flooring surface.
- Adhere Ramp to subfloor with construction adhesive.
- Install vinyl/carpet against 1/8" (height) short side.
- May also be mechanically fastened to sub-floor.

