




## CTC 38 CTS

### Carpet Trim - 1 1/32" Reveal

- 30° slope provides a smooth transition from hard surface to carpet.
- Can be installed with stone, tile or wood.
- Overhang prevents frayed carpet edges.

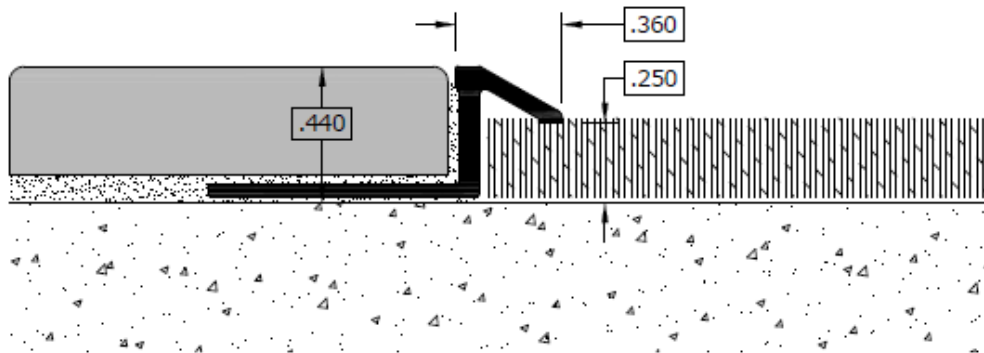

### Installation Instructions

- Adhere perforated leg to sub-floor with hard flooring adhesive.
- Cover entire leg with adhesive and set tile or wood flush with top of carpet trim.
- Leave up to a 1/16" joint along the edge and grout as usual.
- Carpet should be tucked under the overhang when installed.






## CTC 716 CTS

### Carpet Trim - 11/32" Reveal

- 30° slope provides a smooth transition from hard surface to carpet.
- Can be installed with stone, tile or wood.
- Overhang prevents frayed carpet edges.

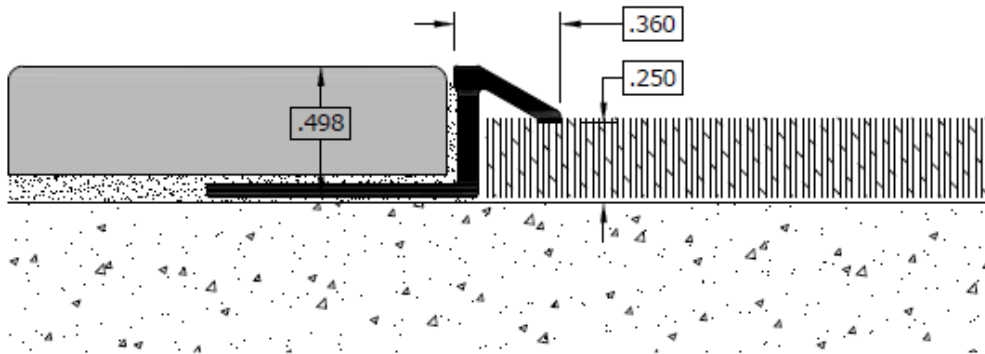

### Installation Instructions

- Adhere perforated leg to sub-floor with hard flooring adhesive.
- Cover entire leg with adhesive and set tile or wood flush with top of carpet trim.
- Leave up to a 1/16" joint along the edge and grout as usual.
- Carpet should be tucked under the overhang when installed.

BUFFALO



STONE®

Featuring  
Buffalo Stone Products